

8 Immediate ways to improve the handling of pigs

- | | |
|---|---|
| <ul style="list-style-type: none"> ✓ Reduce group size ✓ Move pigs forward only when there is space ahead ✓ Remove the appearance of a 'dead-end' on tight bends ✓ Ensure all floor surfaces are non-slip | <ul style="list-style-type: none"> ✓ Remove all obstacles from the path of the pigs ✓ Use increasing diffuse light levels towards the stunning end of the handling system ✓ Reduce mechanical noise ✓ Use calm considerate handling techniques at all times |
|---|---|

If you thinking of altering your handling system or introducing a new system. Then you should consider the following:

1. Conformity

- Is it legal?
- Has it been tested?

2. Flexibility

Will it adapt to future:

- Building changes?
- Operational changes?
- Pig breeds / sizes?

At stun, does it present:

- Suitable group sizes?
- A steady flow of pigs?

3. Useability / Reliability

Can it be easily:

- Installed?
- Operated?
- Inspected?
- Maintained?
- Cleaned?

4. Environment Factors

Have you considered:

- Heating?
- Lighting?
- Ventilation?
- Noise? (for operator and animal)

5. Human Factors

- Is it safe for humans?
- Is it easy to operate?
- Is handling made easier?
- Can all parts be reached?
- Have staff approved it?
- Do staff understand the reasons behind it?
- Does it cater for worst case operators?

6. Animal Factors

- Is it suitable for pig use?
- Is there no risk of injury at all?
- Does it prevent goading?
- Can pigs walk at a natural pace?
- Does it prevent confusion?

7. Cost

- Is it affordable in terms of:
- Installation?
- Running?
- Maintenance?
- Is investment justified?

8. Future Implications

- Have all future implications been considered?

CONSORTIUM MEMBERS:



Cambac Pig Sales



BOWES of Norfolk



GOVERNMENT FUNDING FROM:



Technologies for sustainable farming systems

Improved Handling-Systems For Pigs At Slaughter

A brief project summary

The pre-slaughter handling requirements, of pigs, vary depending on the stunning system in use. The following guide examines current practice, requirements, problems and shows possible solutions to improve the speed and efficiency of handling, to eliminate the use of goads and to reduce stress levels in the lairage.

Cambac JMA Research

in collaboration with

Design Research Centre - University of Brunel

Division of Food Animal Science - University of Bristol



Acknowledgements

This project was funded by industry and the government through the Link programme: Technologies for sustainable farming systems. The authors gratefully acknowledge the participation, co-operation and sponsorship of all consortium members. Lead Researcher - Dr Tracey Jones

Gas Systems

Current Practice



- ▶▶▶ Pigs are moved from a crowd-pen to an enclosed race system
- ▶▶▶ They are encouraged into the cradle of a gas unit through a single entrance
- ▶▶▶ Usually the cradle holds one or two pigs

Requirement

Present pigs at the cradle entrance every 16 sec. Due to the 12sec cradle re-position time:


- single pigs enter the cradle every 4 sec for stun-speeds of 220 pigs/hr
- pairs of pigs enter the cradle every 4 sec for stun-speeds of 440 pigs/hr

Problem Areas

- Group size in a crowd-pen
- Entry to the race
- Stop-start nature of system
- Lack of time to enter cradle
- Level of coercion and goading

Solutions

- Remove the enclosed race and explore group stunning and handling
- To stun in groups at 440 pigs/hr allow 3 pigs 12.5 sec to enter the cradle, or 4 pigs 21sec to enter the cradle
- Provide an open walkway, 900mm wide for 3 pigs and 1200mm wide for 4 pigs
- Ensure that the walkway width equals that of the cradle entrance and the cradle
- Move pigs forward in the required group size with a moving gate, flush to the cradle entrance
- The ideal cradle loading for pigs is side by side; the cradle length is then 1900mm. For pigs loaded in pairs behind each other, a cradle length of 2800mm is required

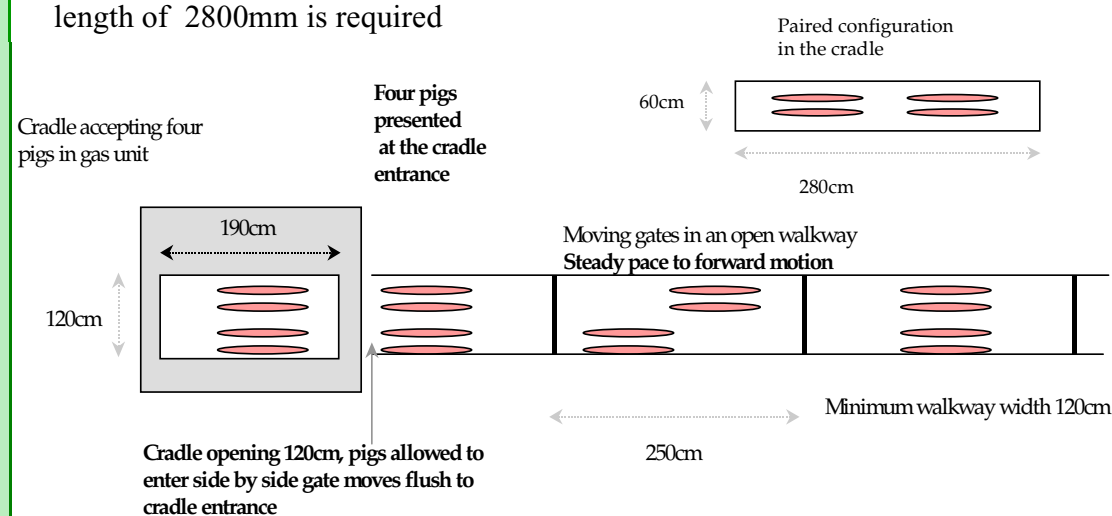

On Floor Electrical Systems

Current Practice



- ▶▶▶ Small groups of pigs are moved in to a stun-pen
- ▶▶▶ Electric tongs are applied by hand
- ▶▶▶ The pig is then shackled by a second operator

Requirements

Present successive pigs for stun:

- every 16 sec, for-stun speeds of 220 pigs/hr
- every 20 sec for stun-speeds of 180 pigs/hr

Problem Areas

- Sharp corners into stun-pen
- Group size
- Slippery floor surfaces
- Stun pen dimensions

Solutions

- The stun-pen should lead straight-on from the holding pens or walkway
- Provide a space allowance of 1.2m²/pig in the stun pen
- Minimum stun-pen length should be: 1800mm for 2 pigs
2500 mm for 8 pigs
- Provide a non-slip floor
- Ensure there are two operators in the stun-pen, one to stun and one to shackle the pig, so as to reduce the stun-to-stick interval.

Further Information

More detailed information relating to these systems can be found in the following two fact sheets

- Generic problem areas of handling systems for pigs at slaughter
- Design specification for handling systems for pigs at slaughter

For further copies of this leaflet, the fact sheets or more information then please contact:

Cambac JMA Research.
Tel: 01249 758868 or Fax: 01249 750143

Restrainer-Conveyor Systems

Current Practice



- ▶▶▶ Pigs are moved from a crowd pen or step-race to a single file enclosed race
- ▶▶▶ They are encouraged into a "V" or chest-belt restrainer
- ▶▶▶ Electric tongs are applied automatically or manually

Requirement

Present successive pigs in single file to the point of stun:

- every 10 sec for stun-speeds of 360 pigs/hr
- every 13 secs for stun-speeds of 280pigs/hr

Problem Areas

- Group size in crowd-pen
- Entering the race
- Pigs waiting in the race
- Entrance to the conveyor - The "Visual cliff effect"

Solutions

- Replace the crowd-pen with a labyrinth-system, for reducing groups of pigs into single-file
- Ensure there are no pinch points in the race
- Provide a race length for 6 - 10 pigs maximum
- Use a batch-approach to filling the race
- Close the race when full with a barred guillotine-gate
- Ensure the level of the floor "drop off" at the restrainer entrance is no less than 1100mm

